


Trade Select[®]

QuickTape[™]

Product Codes: TSQT

Developed specifically for joining, repairs and sealing overlapped edges of building membranes in demanding applications.

Quick and easy to use with superior initial tack and holding power. No release liner for faster fixing

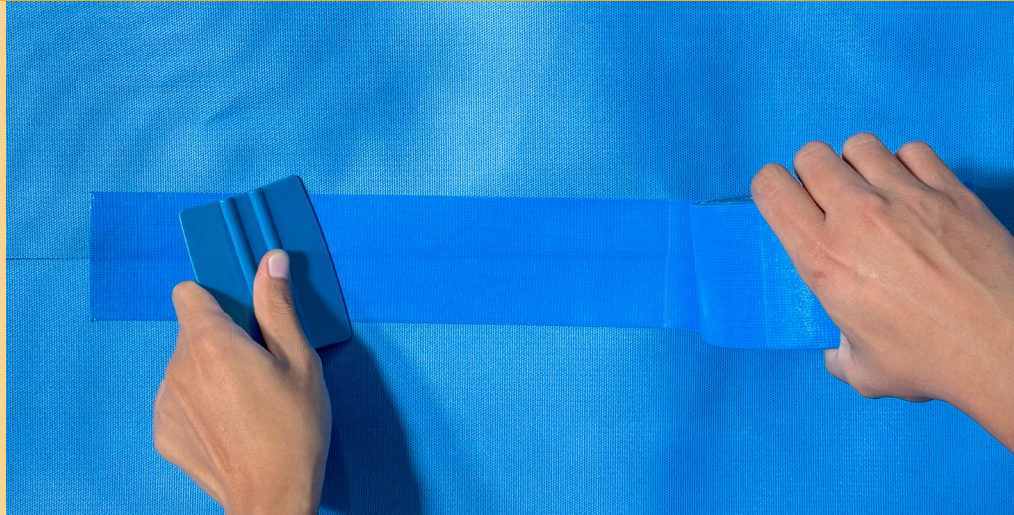

Trade Select[®] QuickTape[™] is a reliable, high performance woven polymer fabric tape coated with a cold weather acrylic adhesive, perfectly suited to quickly and easily join, seal and repair overlapped edges and penetrations of our Trade Select Range and in particular, demanding fabrics such as airtight vapour barriers and permeable membranes.

Trade Select[®] QuickTape[™] benefits from being release liner free, hand tearable and an aggressive initial tack for easier, faster and less labour intensive fixings so time spent installing membranes can be reduced by as much as a third.

Trade Select[®] QuickTape[™] has the thickest premium grade adhesive in our range which provides an excellent initial tack with superior adhesive and cohesive holding power.

Trade Select[®] QuickTape[™] shows performance and durability over a range of temperatures and environmental conditions.

Features and Benefits

- > Hand tearable
- > Fast, easy and reliable fixing
- > Premium adhesion with excellent initial tack
- > Ideal for use with VapourTech[®] Vapour Permeable wall wraps
- > Ideal for airtight sealing for Passivhaus projects
- > Durable for temperatures -30°C to over 80°C
- > Higher adhesion and tack than traditional cloth duct tapes
- > Manufactured by an ISO9001 certified company

Construction



Dimensions

48 mm x 50 m
72 mm x 50 m

Handling and Storage

Store this product at room temperature in a clean, dry place out of direct sunlight.

Shelf life of 12 months when stored at 21°C / 50% RH

Material Properties

Test	Typical Value	Test Method
Product Thickness (Total)	225 µm	PSTC-133/ASTM D 3652
Acrylic Adhesive	110 gsm	
Peel Adhesion	30 N/25 mm	PSTC-101/ASTM D 3330
Tack Rolling Ball	5 cm	PSTC-6 / ASTM D3121
Elongation	15 %	PSTC-131 / ASTM D 3759
Tensile Strength	100 N/25mm	PSTC-131 / ASTM D 3759
Service Temperature	-20°C to +80°C	
Application Temperature	10°C to 40°C	

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Ametalin recommends that the purchaser test for fitness of use in all applications.

QuickTape™ Applications

Trade Select® QuickTape™ is compatible with all Trade Select Pliable Building Membranes and Sarkin-type Materials.

Vapour, Air and Water Control

- > Trade Select® QuickTape™ is a pressure sensitive and heat and moisture resistant tape.
- > Suitable for water control applications ensuring requirements are met.
- > Suitable for use to continuously seal Vapour Barriers.
- > Suitable for use to continuously seal discontinuities, end laps, joints, damage and penetrations.

Trade Select® QuickTape™ can be used in conjunction with concrete, timber, aluminium and steel surfaces that are clean and smooth and free from contaminants.

General Tape Applications:

1. Ensure that the surfaces to be adhered are clean, dry and free from dirt, grease, oil and other contaminants.
2. Ensure Trade Select® QuickTape™ is centered on the join for maximum adhesion to both surfaces.
3. Apply tape, ensuring that the maximum surface contact is achieved by allowing the tape to conform to the contours in product.
4. Apply firm pressure and work in with a squeegee as you apply. Apply tape with a firm backing (e.g., studs) to achieve maximum application pressure. If this is not possible, provide temporary support from behind with short pieces of steel studs or timber as you apply.
5. Do not over-stretch tapes by applying in long runs; keep to short applications at arm's length as you unroll the tape and allow the tape to conform to the surface.
6. Taping of joints is a method of sealing joints only, and is not a suitable substitute for mechanical fixing in situations where there may be stress or pressure on the join (e.g. wind loading, etc.). In such cases, a more secure method of securing the join must be considered and is performed by a competent or professional installer.

Window Penetrations

Dress and seal around windows and door penetrations according to AS/NZS 4200.2 with 72mm Trade Select® QuickTape™.

Australian designed for Australian conditions. Manufactured by: Ametalin 9-11 Playford Crescent, Salisbury North SA 5108 T: +61 8 8285 6955 F: +61 8 8285 5911 E: info@ametalin.com
 © 2025 Ametalin All Rights Reserved. Ametalin is a division of Amalgamated Metal Industries Pty. Ltd. Product information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but due to factors outside our knowledge and control which may affect the use of products, no warranty is given or implied with respect to this information or the product itself regarding the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended purpose. Product colour may vary from batch to batch. Amalgamated Metal Industries Pty. Ltd. reserves the right to amend product specifications without prior notice. Information provided is considered to be true and correct at the time of publication. Manufactured in China. TPM-45937-2

Distributed by:
NATIONAL DISTRIBUTOR
RM INDUSTRIES
 Phone: 1800 764 638
 Email: info@rmindustries.com.au
 www.rmindustries.com.au

Trade Select®
 tradeselect.co