


## Sarking Tape

Product Code: TSIDT-5050

For installing reflective foil insulation and ductwork closure

Ultra-tough with superior adhesion

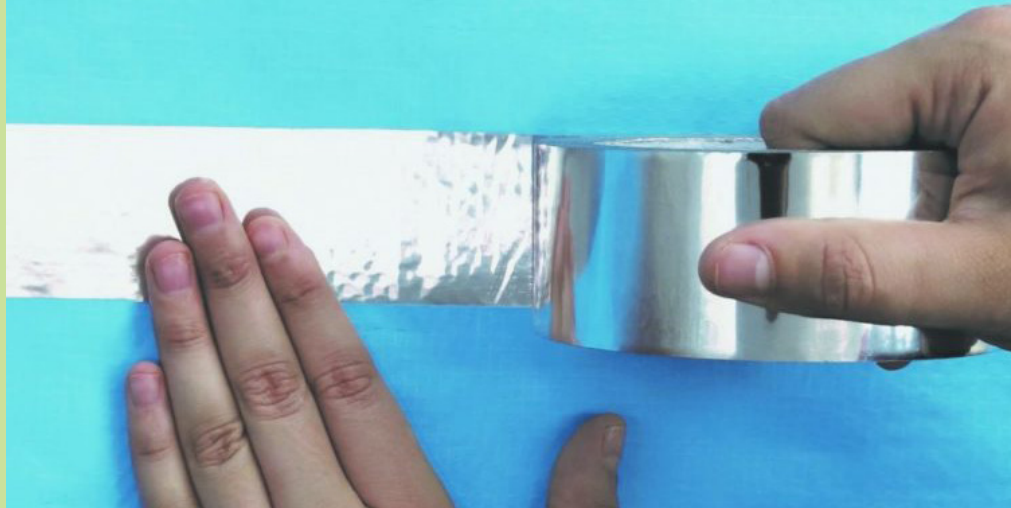


Trade Select® Sarking Tape is a premium grade high performance 0.08 mm UV-resistant metallised polyester tape coated with a cold weather acrylic adhesive. Designed with vapour-sealing properties to complement our full range of reflective membranes, it can be used with all roof sarking, wall wraps and floor insulation. It is also ideal for use in HVAC, ducting, and as an all-purpose tape for boating and camping.

Trade Select® Sarking Tape is easy to apply and provides superior performance and durability over a wide range of temperatures and environmental conditions. It will not delaminate with age.

### Features and Benefits

- > UV resistant
- > Superior strength and flexibility
- > Hand tearable
- > Will not break down or delaminate over time
- > Vapour sealing, ideal for joining insulation products
- > High performance over a wide temperature range: -30°C to +100°C
- > Higher adhesion and tack than traditional cloth duct tapes
- > Excels in high heat
- > Moisture resistance in humid conditions

### Construction



- > Metallised Polyester (MPET)
- > Acrylic PSA

### Dimensions

48 mm x 50 m

### Handling and Storage

Store this product in a clean, dry place out of direct sunlight.

### Material Properties

TEST	TYPICAL VALUE	TEST METHOD
PRODUCT THICKNESS (TOTAL)	80 µm	PSTC-133/ASTM D 3652
PEAL ADHESION	15 N/25 mm	PSTC-101/ASTM D 3330
TENSILE STRENGTH	95 N/25 mm width	PSTC-131/ASTM D 3759
ELONGATION	100%	PSTC-131/ASTM D 3759
MINIMUM SERVICE TEMPERATURE	-30°C	
MAXIMUM SERVICE TEMPERATURE	+100°C	
APPLICATION TEMPERATURE	10°C to 40°C	

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Ametalin recommends that the purchaser test for fitness of use in all applications. Application surface must be clean, dry and free of oil and other contaminants. Apply pressure with plastic squeegee, ensuring that all contours are followed.

## Tape Application

1. Ensure that the surfaces to be adhered to are clean, dry and free from oil and other contaminants.
2. Ensure tape is centred on the join.
3. Apply tape, ensuring that the maximum surface contact is achieved by allowing the tape to conform to contours in the product. Apply firm pressure with squeegee as you apply the tape.
4. For thicker foam core products such as Trade Select® ThermalBreak®, Trade Select® Reinforced Ducting Tape is recommended and should be applied as deeply as possible into the perpendicular angle.
5. Whenever possible, apply tape to joins that have a firm backing (e.g. studs or rafters) to achieve maximum application pressure. If this is not possible, then provide support from behind with short pieces of steel studs or timber.
6. Taping of joins is a method of sealing joins only, and is not a suitable substitute for mechanical fixing in situations where there may be stress or pressure on the join (e.g. wind loading, etc.). In such cases, a more secure method of securing the join must be considered.

Australian designed for Australian conditions. Manufactured by: Ametalin 9-11 Playford Crescent, Salisbury North SA 5108 T: +61 8 8285 6955 F: +61 8 8285 5911 E: info@ametalin.com  
© 2025 Ametalin All Rights Reserved. Ametalin is a division of Amalgamated Metal Industries Pty. Ltd. Product information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but due to factors outside our knowledge and control which may affect the use of products, no warranty is given or implied with respect to this information or the product itself regarding the suitability of the product for any particular purpose. The usage of this and other building membranes will affect moisture migration in the building element. The purchaser should independently determine the suitability of the product for the intended purpose. For large projects with complex air-conditioning and condensation issues, designers may wish to contact our technical department. Product colour may vary from batch to batch. Amalgamated Metal Industries Pty. Ltd. reserves the right to amend product specifications without prior notice. Information provided is considered to be true and correct at the time of publication. Manufactured in Australia with globally sourced materials under a ISO9001 Certified Quality Management System. TPM-45937-1

Distributed by:  
**NATIONAL DISTRIBUTOR**  
**RM INDUSTRIES**  
Phone: 1800 764 638  
Email: info@rmindustries.com.au  
www.rmindustries.com.au

**Trade Select**<sup>®</sup>  
tradeselect.co